

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

## HORIZON BOTTOM MOUNT REACH-IN

HBF12HC Solid Door Reach-In Freezer

Hydrocarbon Series





## 5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Stainless steel front, side, and grille (galvanized back & bottom)
- · Stainless steel interior
- · Full electronic control with one-touch defrost
- One-piece grille allow easy removal/installation for preventative maintenance
- Self closing door with 120° stay open feature
- LED lighting
- Spring-loaded style hinges
- · Plug-in magnetic door gaskets
- Four (4) heavy duty epoxy coated wire shelves
- 6" Casters with two (2) brakes

#### **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- 3" Casters or 6" legs
- · Epoxy shelves
- Shelf clips
- Remote option\* (see note on back page)

#### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- · Hot gas condensate evaporator
- Adaptive defrost
- Epoxy coated evaporator coil
- Freezer capable of maintaining product temperature down to












MODEL	HBF12HC-1
EXTERNAL DIMENSIONAL DATA	
Width Overall	24"
Depth Overall with Handle	26"
Height Overall	67 ¾"
Number of Doors	1
Depth with Door Open 90°	46 1⁄4"
Door Opening (in)	20 1/8" x 48 1/2"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	11.9
Internal Width Overall (in)	21"
Internal Depth Overall (in)	18 ¼"
Internal Height Overall (in)	48 ¾"
Internal Height Useable (in)	44 ¾"
Number of Shelves	4
ELECTRICAL DATA	
Full Load Amperes 115/60/1	5.0
REFRIGERATION DATA	
Horsepower	1/2
Capacity (BTU/Hr)	1624
Heat Rejection (BTU/Hr)	2436
Charge (lbs/grams)	0.1102/50
SHIPPING DATA	
Gross Weight - Crated	284 lbs
Height - Crated	68"
Width - Crated	27"
Depth - Crated	29"

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

# **Bottom Mount Reach-In Freezer Model: HBF12HC-1**

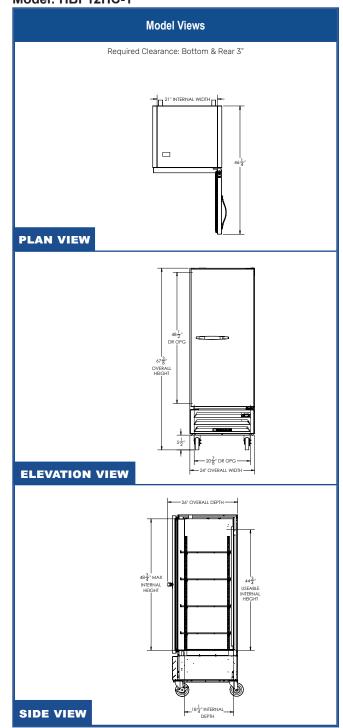



## **ELECTRICAL CONNECTION**



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.