



# BEVERAGE-AIR

Project: _____	AIA#
Item: _____	
Location: _____	SIS#
Approved: _____	

# TMF1HC TOP MOUNT REACH-IN FREEZER

## TOP MOUNT REACH-IN FREEZER

TMF1HC Reach-In Freezer  
Hydrocarbon Series

MODEL:  
TMF1HC-1S



**4 Year Parts/Labor Warranty Available**  
**7 Year Compressor Warranty**

### CABINET CONSTRUCTION

- Intelligent temperature control reduces energy consumption
- Three (3) shelves per section
- Door lock
- Stainless steel exterior and interior
- Easy access to the refrigeration system
- 6" Heavy-duty casters, two (2) with brakes
- Energy efficient LED lights
- Fill mark helps to prevent overpacking



### ACCESSORIES

- 2 Year parts/labor standard, additional 2 year warranty available
- Additional shelves

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporator and face heater
- Electric defrost heater
- Coated evaporator coil
- Freezer capable of maintaining product temperatures of 0°F and below



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

3779 Champion Blvd., Winston-Salem, NC 27105  
1-888-845-9800 Fax: 1-336-245-6453  
Beverage-Air.com Sales@bevair.com




# BEVERAGE-AIR

MODEL	TMF1HC-1S
<b>EXTERNAL DIMENSIONAL DATA</b>	
Width Overall	26 5/16"
Depth Overall	33 9/16"
Height Overall	80 1/2"
Number of Doors	1
<b>INTERNAL DIMENSIONAL DATA</b>	
NET Capacity (cubic ft.)	19
Internal Width Overall (in)	22 1/32"
Internal Depth Overall (in)	28 3/32"
Internal Height Overall (in)	56 9/32"
Number of Shelves	3
<b>ELECTRICAL DATA</b>	
Full Load Amperes 115/60/1	4.73
<b>REFRIGERATION DATA</b>	
Horsepower	1/2
Capacity (BTU/Hr)	2001
Heat Rejection (BTU/Hr)	3002
Charge (lbs/grams)	0.1676/76
<b>SHIPPING DATA</b>	
Gross Weight (crated lbs)	304 lbs
Height - Crated	81"
Width - Crated	28"
Depth - Crated	35"


## Top Mount Reach-In Freezer Model: TMF1HC-1S

### Model Views


Required Clearance: Top 12", Rear 3", Side 0"



### PLAN VIEW

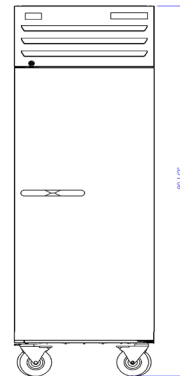

### ELEVATION VIEW

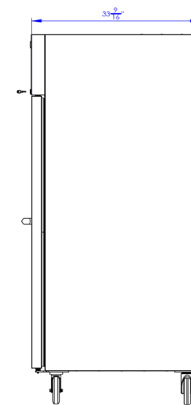

### SIDE VIEW

### ELECTRICAL CONNECTION



115/60/1  
NEMA 5-15P

Unit pre-wired at factory and include 9.8' long cord and plug set.

