

# MILANO-115 ROTATING OVEN

## Code:

- M-115

## Baking Surface:

- Rotating

## Fuel Options:

- M-115W-Wood
- M-115G-Gas
- M-115C-Combi

## Overview

The Milano oven is appealing, free-standing and can be built into an enclosure. Available in a variety of custom colours, it is sure to create a unique focal point in your restaurant. The oven's straight, metal exterior makes it the perfect solution for enclosed construction projects.

Rotating ovens are ideal for fast-paced, high volume baking while still emphasizing production quality. It allows you to minimize the number of staff required, and maximize the use of your workspace.

## Pizza Capacity

10"	12"	14"	16"	18"	20"
13	9	7	4	4	2

## Standard Features

- Constructed with vibrated refractory stone
- Suitable for various foods: pizza, pita, bread, slow cooking meat & fish
- Heats up rapidly up to 950° Fahrenheit (510°C)
- Efficient temperature maintenance with no heat loss
- Heavy duty steel stand
- Rotating refractory stone baking surface
- Touch screen rotation controller, also controls gas on gas equipped ovens.

## Certification

- ETL approved for Canada/USA

## Warranty Information

- 4 Year deck and dome refractory stone warranty
- 1 Year parts and labour warranty



Images for demonstrative purposes only. Equipment shown may not be included in your custom quote. Consult quote for custom options.




## Standard Finish

- Plain unfinished
- Additional colours or finishes are extra (see quote)

## Customization Options

- Delivered assembled or assembled on site.
- Custom mosaic colour, pattern and branding
- Several door options, sizes and colours available ([See brochure](#))
- Granite mantle
- Left or right burner position (gas/combi ovens)
- Propane or Natural Gas (gas/combi ovens)
- Debris collector
- Oven tools


# MILANO-115 ROTATING OVEN M-95

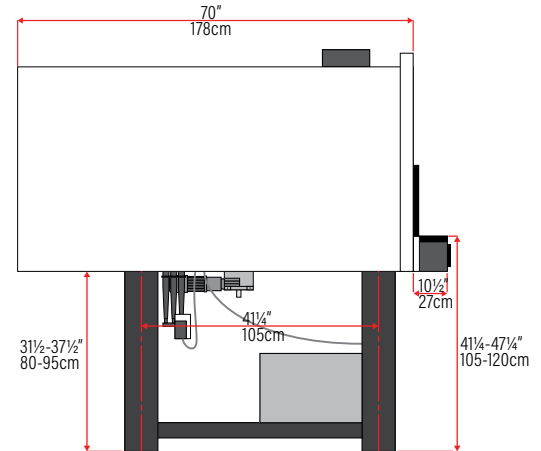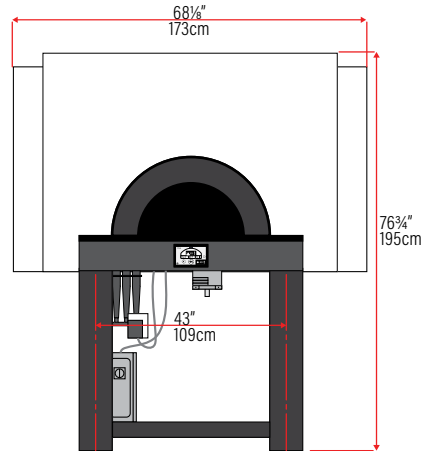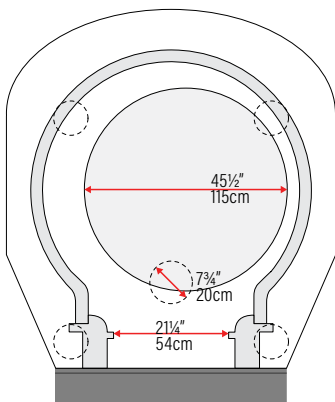


Clearance requirement is 3" (8cm) on all sides and 6" (16cm) on the top.  
Optional granite mantle pictured

## Fuel Position


Left side standard, right side optional.



WOOD



GAS



COMBINED

## Venting Requirements

Vent Type	Wood	Gas	Combi
Direct Vent	✓	✓	✓
Hood Vent		✓	

- The oven is vented through a 7 3/4" round duct collar.
  - Direct Venting** requires a double wall chimney pipe.
  - Direct vent flue adapter available: 7 3/4"-8"
  - Hood Venting** requires installation under a type 1 exhaust hood.
- Installation & venting is subject to the local authorities approval.

## Gas Requirements (if equipped)

- 99,000 BTUs, 3/4" NPT
- Inlet pressure for natural gas 7" water column
- Inlet pressure for liquid propane gas 11" water column

Gas components must be accessible at all times for maintenance purposes.

## Electrical Information

All rotating ovens are supplied with a state of the art touch screen controller to control rotation, and gas if equipped..

Controller	Power	Plug	Cord
Touch Screen	220V/1phase	NEMA 6-15P ⊕	9' 274cm

### Oven Specifications

Baking Area	Width	Depth	Height	Weight
ø 45 1/2"	68 1/8"	70"	76 3/4"	3300Lbs
ø 115cm	173cm	178cm	195cm	1500Kg

### Shipping Specifications (Assembled in crate)

Width	Depth	Height	Weight
76"	78"	86"	3700Lbs
192cm	197cm	218cm	1680Kg

Shipping weight and dimensions may vary based on oven options selected.