

**Refrigeration Equipment  
Sandwich/Salad Preparation Table,  
48" 12GN 1/6 containers- Stainless  
Steel (R290)**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738256 (TSSU48)

2-door sandwich/salad preparation table for 12 GN 1/6 containers, 48", R290 refrigerant gas, +33/+41°F, stainless steel

**Short Form Specification**

Item No. \_\_\_\_\_

2-door sandwich/salad refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 430 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 48x11,4x0,5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature. Temperature range: +33/+41°F. R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

**Main Features**

- External temperature display.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

**Construction**


- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 12 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

**Optional Accessories**


- shelf for 48" and 72" (left/right) mega top, salad and undercounter  PNC 880597
- shelf clips  PNC 880611

APPROVAL: \_\_\_\_\_


**Front**

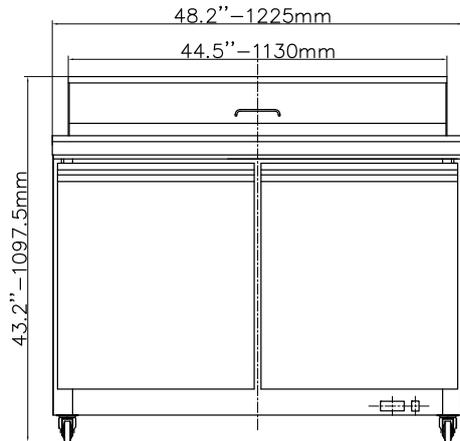

**Side**

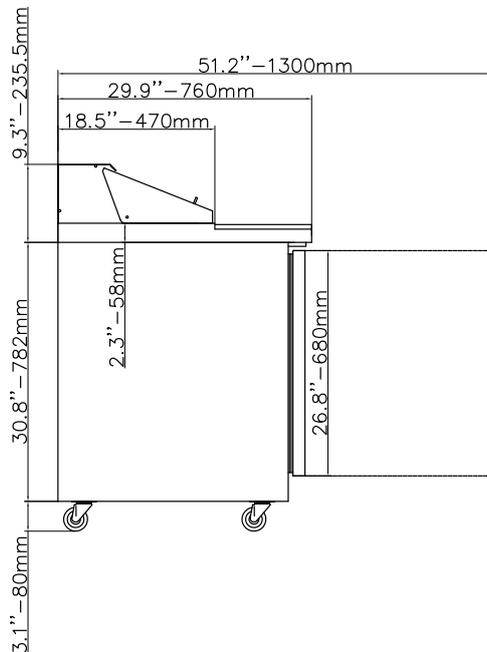

**Top**

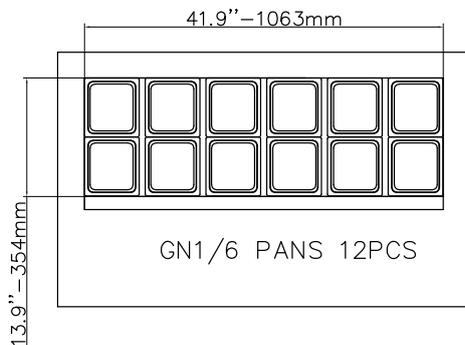

**EI** = Electrical connection  
**RI** = Refrigerant Inlet  
**RO** = Refrigerant Outlet

**Electric**

**Supply voltage:**  
738256 (TSSU48) 115 V/1 ph/60 Hz  
**Electrical power, max:** 0.7 kW  
**Current consumption:** 7 Amps  
**Plug type:** USA NEMA 5-15P

**Capacity:**

**Gross capacity:** 12 cu.feet

**Key Information:**

**Door hinges:** 1 Left+1 Right  
**External dimensions, Width:** 48 1/4" (1225 mm)  
**External dimensions, Depth:** 29 15/16" (760 mm)  
**External dimensions, Height:** 43 1/4" (1097.5 mm)  
**Number and type of doors:** 2 Full  
**Internal Dimensions (depth):** 23 13/16"  
**Internal Dimensions (height):** 23 1/2"  
**Internal Dimensions (width):** 42 13/16"  
**Shipping height:** 47 1/4" (1200 mm)  
**Shipping weight:** 335 lbs (152 kg)  
**Shipping volume:** 42.88 ft<sup>3</sup> (1.21 m<sup>3</sup>)  
**Type of grids (included):** Vinyl-Coated steel  
**Type of external material:** Stainless Steel  
**Type of internal material:** Polystyrene  
**Warranty:** 3 / 5 years

**Refrigeration Data**

**Compressor power:**  
**Refrigerant type:** R290  
**Refrigerant weight:** 90 g  
**Operating temperature min.:** 32 °F  
**Operating temperature max.:** 41 °F  
**Condenser type:** Fin & tube  
**Defrost type:** Auto Defrost

