

Specification/Data sheet


UltraVent® Recirculating hood 62/102 E - USA/Canada



Article number: 60.74.972

Description

- The condensation technology in the UltraVent absorbs and dissipates steam.
- There is no need for complicated and expensive installations to remove exhaust air. Installation is simple and it can be retrofitted at any time. There is no need for a connection to the outside.

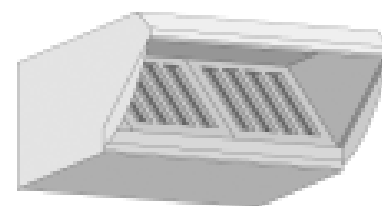

Special feature

- High extraction power
- Proximity door contact switch
- Automatic increase of extraction power when cooking cabinet door is opened
- Waste water discharge through the unit, no additional discharge require

Certificates and Listings

- Approved for UL 197 and 507 and C 22.2, CSA 22.2 No. 109 and CSA 22.2 No 113-15
- EPA 202
- NSF Certification

Notes

- The local standards and regulations for ventilation systems must be adhered to.
- The UltraVent 62/102 E condensation hood can be used for right and left hand door units. Supplied with installation options for both variants. The combination with a left-hinge door restricts the extraction function of the UltraVent.
- Not for use with RATIONAL VarioSmoker
- Available for H series 9/2011 Whiteefficiency models
- When used with type 62 units, use a raised base cabinet US III version UltraVent
- Not available for the base cabinet UG II catering due to height
- Grease filter left: 60.72.440
- Grease filter right: 60.72.441
- The UltraVent 62/102E can not be retrofitted for a Combi-Duo installation

Technical Info

- Connection: 100-125V 1 NAC 50/60 HZ
- Comes with 8'2" (2.5 m) power cord with 5-15 P plug
- Connected load: 450 W
- Extraction power: 165 - 335 ft³/min
- Operating noise level: 70 dBA
- Width: 42 3/8" (1076 mm)
- Height: 17 3/4" (450 mm)
- Depth: 56 1/8" (1427 mm)
- Weight: 176 lbs (80kg)
- Needs 18" (450 mm) clearance above

Material

- Stainless steel (CNS 1.4301 /CNS 304)

