

| Item: | |
|-------------|--|
| Quantity: _ | |
| Project: | |

Royal Series

| Models: ☐ RECO-1 | ☐ RECO-2 | □ RECO-6K-1 | ☐RECO-6K-2 | |
|------------------|----------|-------------|------------|--|
|------------------|----------|-------------|------------|--|



RECO-1 with optional casters

Voltage: ☐208

240 - 1 Phase 240 - 3 Phase*

*240 Not Available for 6K units

Standard Features

- Accommodates full size sheet pans side to side
- 3 heating elements for a total of 9 KW power (RECO Models Only)
- 2 heating elements for a total of 6 KW power (RECO-6K Models Only)
- Electric thermostat adjustable from 150°-500° F
- Two speed motor
- Cool touch controls set back for protection
- Glass window in the right hand door
- Two interior lights
- Oven interior is porcelain coated for easy cleaning
- Doors feature 3 brass bushings per door hinge for perfect door alignment
- Oven doors swing open 135° for easier access for loading and removing pans
- 5 Chrome plated racks standard with 11 positions
- All S/S front, sides, and top construction
- Oven interior useable space: 29" W x 22½" D x 24" H


Options and Accessories

- ☐ Stacking kit to stack two single deck units (includes 6" legs)
- ☐ 5" swivel casters (set of four 2 locking)
- ☐ Extra oven racks (Qty: _____)
- ☐ Glass view door for left side (right is standard)
- ☐ Pan rack (RECO-1 Only)
- ☐ 480 Voltage 3 Phase
- Moisture injection







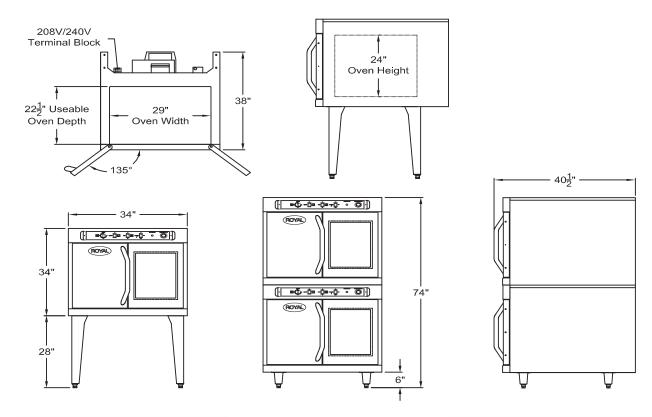

| Model Number | Total KW | Ship Weight |
|--------------|----------|-------------|
| RECO-1 | 9 | 495 lbs. |
| RECO-2 | 18 | 940 lbs. |
| RECO-6K-1 | 6 | 495 lbs. |
| RECO-6K-2 | 12 | 940 lbs. |

Electrical: Two speed motor (1725/1140 rpm) 230V, 50/60 Hz, ½ HP Terminal block for power cord connection with ground lug.

Heating Elements:

| Voltage (V) | Phase | Total KW | Current (Amps) |
|-------------|-------|----------|---------------------|
| 208 | 1 | 9 | 45 |
| 208 | 3 | 9 | L1-26, L2-25, L3-25 |
| 240 | 1 | 9 | 39 |
| 240 | 3 | 9 | L1-23, L2-22, L3-22 |
| 480 | 3 | 9 | L1-12, L2-11, L3-11 |
| 208 (6K) | 1 | 6 | 29 |
| 240 (6K) | 1 | 6 | 25 |

Clearances:

| | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear | 0" | 0" |
| Sides | 0" | 0" |

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.