

# SMARTVIDE 7 120/60/1

2 Hp / 1400 W. Max. capacity: 56 lt./14 gal.

P/N. 1180123



# SALES DESCRIPTION

Commercial high-precision sous-vide cooker. Reliable, user-friendly, portable. Ideal for regeneration.

Interchangeable between °C and °F.

- Bluetooth connectivity.
- √ HACCP-ready.
- Optional core probe.
- Firmware update.

# FEATURES AND BENEFITS

Portable precision cooker with stirrer for up to 56 lt. / 14 gal. containers. Deisgned for chefs, developed with chefs.

- √ The thick stainless steel, robust construction guarantees commercial performance. The front panel and the grip are made of fiberglass-reinforced polyamide.
- √ SmartVide guarantees cooking at a precisely controlled temperature while preserving the quality of the product, enhancing flavor and texture. Equipped with a highly precise temperature control system to obtain extremely consistent results.
- √ Allows cooking food in their own juice and using this juice immediately after cooking to enhance flavors.
- ✓ Marinates and macerates an ingredient in half the time.
- ✓ **Infuses and flavors** oil, fat or other products applying the controlled temperature technique.
- ✓ Increses profits due to lack of product shrink.
- √ Requires very little hands-on time, allowing the Chef to do other tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest. 4 buttons and a full-color TFT display that offers all the information at a glance makes operation a child's play.
- ✓ SmartVide7 is **portable**: thanks to their ergonomic handle, SmartVide7 can be taken from a container to another easily. Additionally, the optional bag allows easy transport - wherever the Chef goes.
- √ HACCP-ready: thanks to Bluetooth connectivity, it is possible to export or print cooking results at the end of each cycle.
- √ Your appliance, always updated: free firmware update, no matter where the appliance is.

# Accessories

■ Needle Probe for sous-vide ☐ SmartVide transport bag cookers ■ Smooth bags for sous-vide ☐ Probe Foam Seal cooking Insulated tank for SmartVide immersion circulator ■ Lid for SmartVide ☐ Floating balls for SmartVide









usa@sammic.com 1225 Hartrey Avenue 60202-1056 Evanston, IL phone +1 (224) 307-2232 toll free +1 844 275 3848



Project	Date
Item	Qty
Approved	

# FOOD PRESERVATION AND SOUS-VID

# 2 Hp / 1400 W. Max. capacity: 56 lt./14 gal.





# **SPECIFICATIONS**

# **Temperature**

Display precision: 0.1 °F

Range: 41 °F - 203 °F

Permissible ambient temperature: 41 °F -

104 °F

## Time

Resolution: 1 '

Cycle duration: 1 ' - 99 h

# **General features**

Maximum recipient capacity: 14 gal.

Total loading: 2 Hp

Electrical supply: 120 V / 50-60 Hz / 1 ~

(12 A)

Plug: USA

Submergible part dimensions: 4.6 " x 4.3 "

External dimensions (WxDxH): 4.9 " x 5.5 "


x 14.2 "


Net weight: 7.9 lbs.

# **Crated dimensions**

17.3 x 7.5 x 12.2 "

Gross weight: 12.1 lbs.

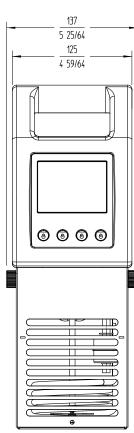

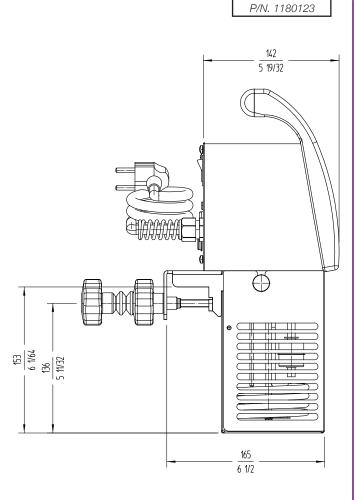



usa@sammic.com 1225 Hartrey Avenue 60202-1056 Evanston, IL phone +1 (224) 307-2232 toll free +1 844 275 3848



Project [	Date
Item C	Qty