



BISTRO TWISTER 130 WOOD/GAS

SERIES: PAVESI ROTATING OVENS



Standard Pavesi
Bistro Twister 130
Wood/Gas

JOB NAME: _____

REFERENCE INVOICE #: _____

CUSTOM FACADE: YES NO

CUSTOM FACADE DOCUMENT #: _____

BURNER POSITION: L R

• *Bistro Twister 130 W/G is constructed in a place by a certified Fiero Group Technician.*

REFRACTORY MONOBLOCK FLOOR

The Pavesi Bistro Twister features the world's only refractory commercial brick oven floor in one solid block.

TRADITION & TECHNOLOGY

The Pavesi Bistro Twister is designed to preserve traditional Italian hearth oven dynamics with the ease and consistency of a rotating floor.

VERSATILE & RELIABLE

The Pavesi Bistro Twister design exceeds at holding a wide variety of temperatures to achieve almost any pizza size and style.



Approved by
the Association
of Neapolitan
Pizzaiuoli of
America

FEATURES

The Bistro Twister 130 Wood/Gas is a hand-built Italian hearth-style brick oven which features a rotating refractory oven floor. The solid, single piece refractory floor diameter is 51", with a front-facing oven arch opening which allows access to the hearth at 24 1/2" wide by 9 1/4" tall. Wood fuel is combusted within the oven hearth, to the side of the rotating floor. A steel ash catch allows wood to burn and drop into a fire-proof container placed on the floor underneath the oven. The oven is supplied with a single-flame powered gas burner for use as a primary oven heat source.

The internal refractory dome and single piece floor are sealed with a refractory cement and over-insulated with high quality asbestos-free ceramic blankets to ensure maximum heat retention. The external structure is formed by a tiled dome and sits on top of four circular dark gray steel legs. Custom facade options can be found online at www.fierogroup.com.

BAKING SURFACE	OVEN OPENING	EXTERNAL WIDTH	EXTERNAL DEPTH
 1300 mm 51"	 235 mm 9.25" 620 mm 24.5"	 2150 mm 84.75"	 1864 mm 73.5"

GAS REQUIREMENTS

This equipment may be used with LP gas or natural gas.

CONNECTION SIZE:	3/4" Male threaded			
	LP GAS		NATURAL GAS	
GAS PRESSURE:	11-14 in H ₂ O		5.5 - 14 in H ₂ O	
	●	○	●	○
ORIFICE SIZE:	#30		#5	
HOURLY BTU INPUT RATING:	28,000 Btu/Hr	140,000 Btu/Hr	28,000 Btu/Hr	140,000 Btu/Hr

● MINIMUM BTU ○ MAXIMUM BTU *(Burner uses an automatic modulation control system that adjusts BTU according to need.)*

OVEN PRODUCTION

12" PIZZA CAPACITY: 10 - 12 PIZZAS

RECOMMENDED BAKING TIME: 90 - 240 SECONDS
(DEPENDING ON PIZZA STYLE)

RECOMMENDED OVEN FLOOR

TEMPERATURE RANGE: 600°F - 900°F
(DEPENDING ON PIZZA STYLE)

DAILY PREHEAT TIME: 60 MINUTES

ROTATION MOTOR CONTROL PANEL



FIERO GROUP
601 N Main St, Brewster, NY 10509
Email: info@fierogroup.com
www.fierogroup.com

844-OVEN-INC (844-683-6462)
Toll-free in USA
(Hablamos Español,
Falamos Português)

Listed to: UL 2162-ULC/ORD C2162,
ANSI Z83.11-CSA 1.8, & NSF-4 for
Commercial Wood Fired and
Gas Fired Cooking Equipment



DOC#: BISTROTW130-1218

REVISED WINTER 2020. As products continue to improve, spec sheets may change without notice. Please call Fiero Group for the latest specification sheet and for further details.

MADE IN ITALY



BISTRO TWISTER 130 WOOD/GAS


SERIES: PAVESI ROTATING OVENS

DETAILED SPECS


WEIGHT:
3,638 LB

We make every effort to provide accurate information regarding manufacturer's reported dimension information. Please note that due to the artisan nature of the manufacturing process, from time to time, product sizing and ship weight may vary slightly.

PLAN VIEW

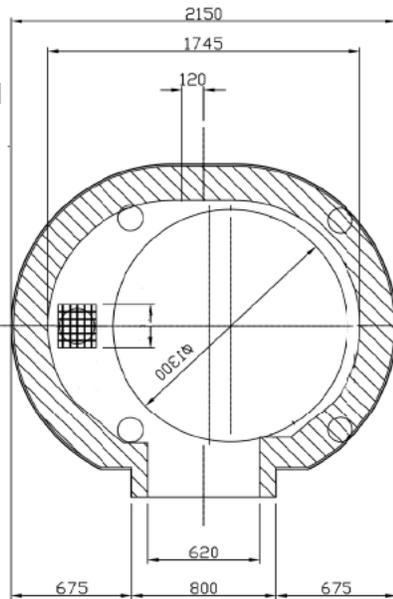


FRONT ELEVATION

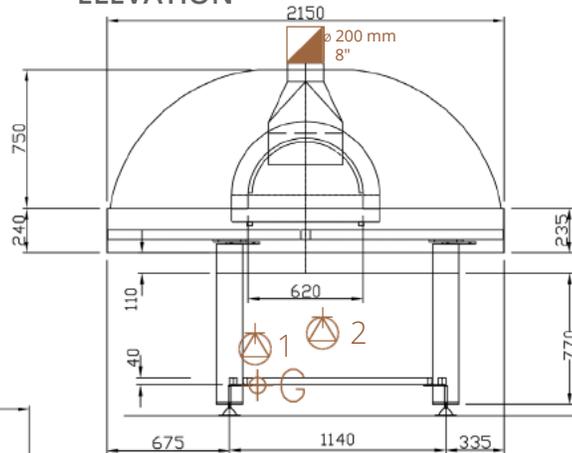

LEFT ELEVATION

Pictured: Left Gas Disposition

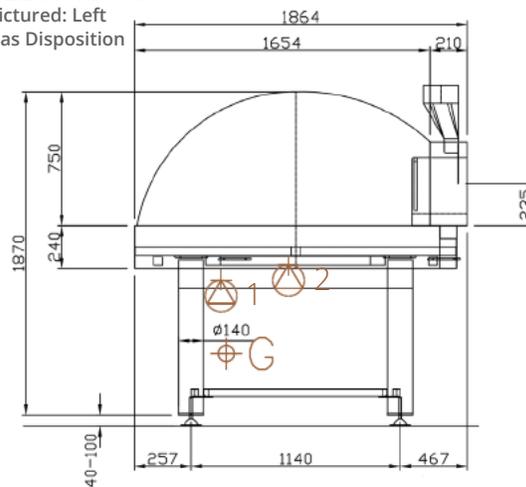

KEY

	1	Gas Burner Electrical Connection
	2	Rotation Motor Electrical Connection
	G	Gas Connection
		Flue Collar Exhaust Connection
		Wood Grate/ Ash Catch

CLEARANCES

Minimum clearance of the oven (built-in or standalone) to combustible materials are as follows:

Top: 14" (356 mm)
Back & Sides: 1" (25 mm)


- Non-combustible flooring must extend out at least 36" (914 mm) from oven opening and at least 30" (762 mm) to each side of the opening.
- Do not fill required air space with insulation or other materials.

VENTILATION REQUIREMENTS

Direct connection as a natural draft, grease-rated chimney system per NFPA 96 and UL 2162 is recommended. If the duct run exceeds 20 feet or incorporates a 90° elbow, a UL 705 & UL 762 listed rooftop exhaust fan shall be installed to ensure adequate pressure within the duct. A Listed Type 1 exhaust hood, or one constructed in accordance with

all relevant local and national codes (NFPA 96), may also be installed above the oven in instances where a natural/power draft chimney system is otherwise impossible. See "Ventilation Document - Pavesi" for details.

Operational airflow: 150-200 CFM
Static Pressure at Flue Collar: 0.05 in H₂O



FLUE COLLAR CONNECTION DIAMETER (INTERNAL)

ELECTRICAL REQUIREMENTS

- | | |
|----------------------------|--------------------------|
| Gas Burner | Rotation Motor |
| ■ 120 VAC,
1.2 A, 60 Hz | ■ 120 VAC,
7 A, 60 Hz |

WARRANTY INFORMATION

10 year limited warranty on internal refractory parts, 1 year limited warranty on electrical, gas and other components. See warranty document for details.

FIERO GROUP
601 N Main St, Brewster, NY 10509
Email: info@fierogroup.com
www.fierogroup.com

844-OVEN-INC (844-683-6462)
Toll-free in USA
(Hablamos Español,
Falamos Português)

Listed to: UL 2162-ULC/ORD C2162,
ANSI Z83.11-CSA 1.8, & NSF-4 for
Commercial Wood Fired and
Gas Fired Cooking Equipment

